



- Options:**
- Bronze Handwheels ①
 - Open-Shut Indicators ②
 - Locking Devices ③

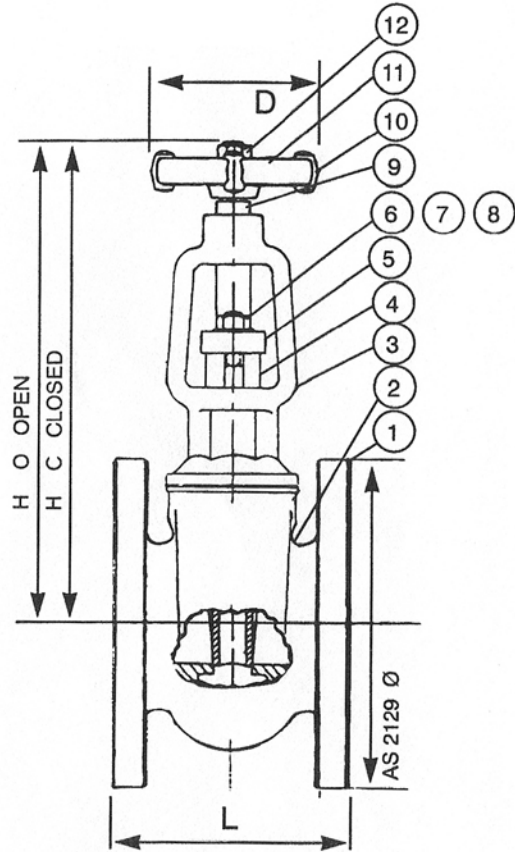

NOTE
Bolted Bonnet – Size 100mm

Flanges:
AS2129 Table 'F' & ('H')

④ Available: ANSI · JIS · DIN

Dimensions

Size mm	8	10	15	20	25	32	40	50	65	80	100
L	•	•	70	74	89	102	117	143	156	172	210
H %	•	•	138/155	152/175	175/203	200/238	224/263	264/319	324/400	365/444	450/559
D	•	•	65	65	90	90	90	120	150	150	190
Wt/kgs	•	•	2.2	2.5	3.6	5.0	6.3	10.5	15.0	20.0	40.0

■ **Pressures:** 2100 kPa CWP
Maximum Working Pressure @ 100°C

■ **Standards:**
AS 1628 – 1994: Copper Alloy Valves
AS 3855: Materials to suit Potable Water Service

ITEM	DESCRIPTION	MAT'L	STANDARD
15	NUT	M. STEEL ZP	8 PCS
14	GASKET	NEO CORK	
13	STUD BOLT	M. STEEL ZP	8 PCS
12	HANDWHEEL NUT	BRASS	
11	NAMEPLATE		
10	HANDWHEEL	ZINC ALUM BRONZE	AS1874 AS1565
9	SPINDLE	DR BRASS	AS1567 -352
6/7/8	STUD BOLT – S/WASHER – NUT	M. STEEL ZP	2 PCS
5	GLAND	GUNMETAL BRONZE	AS1567 C83600M
4	GLAND PACKING	PTFE GPI BUSH	AS1198
3	COVER – YOKE BONNET	GUNMETAL BRONZE	AS1565 C83600M
2	WEDGE – GATE	GUNMETAL BRONZE	AS1565 C83600M
1	BODY	GUNMETAL BRONZE	AS1565 C83600M



Braemar Valves Pty Ltd
ABN 93 099 537 357
5 Harley Crescent
Condell Park NSW 2200

FIG No **T160** BRONZE GATE VALVE
FLANGED-OS&Y CLASS 21
PN 20

DRAWN	RJK	21.4.98	DRAWING NO. 10332-40
SCALE	/	NTS	

The detail contained in this sketch/drawing is the property of Braemar Valves Pty Ltd and cannot be copied or reprinted without permission from Braemar Valves Pty Ltd or their agents.

FORM# 1297/1